



modo
LIGHT WITHOUT BORDERS

ELTOR
IDEAS IN LIGHTING

Modular led light source
that adapts to Your enviroment

**MODULARNO RASVJETNO TIJELO KOJE
SE PRILAGOĐAVA VAŠEM INTERIJERU**

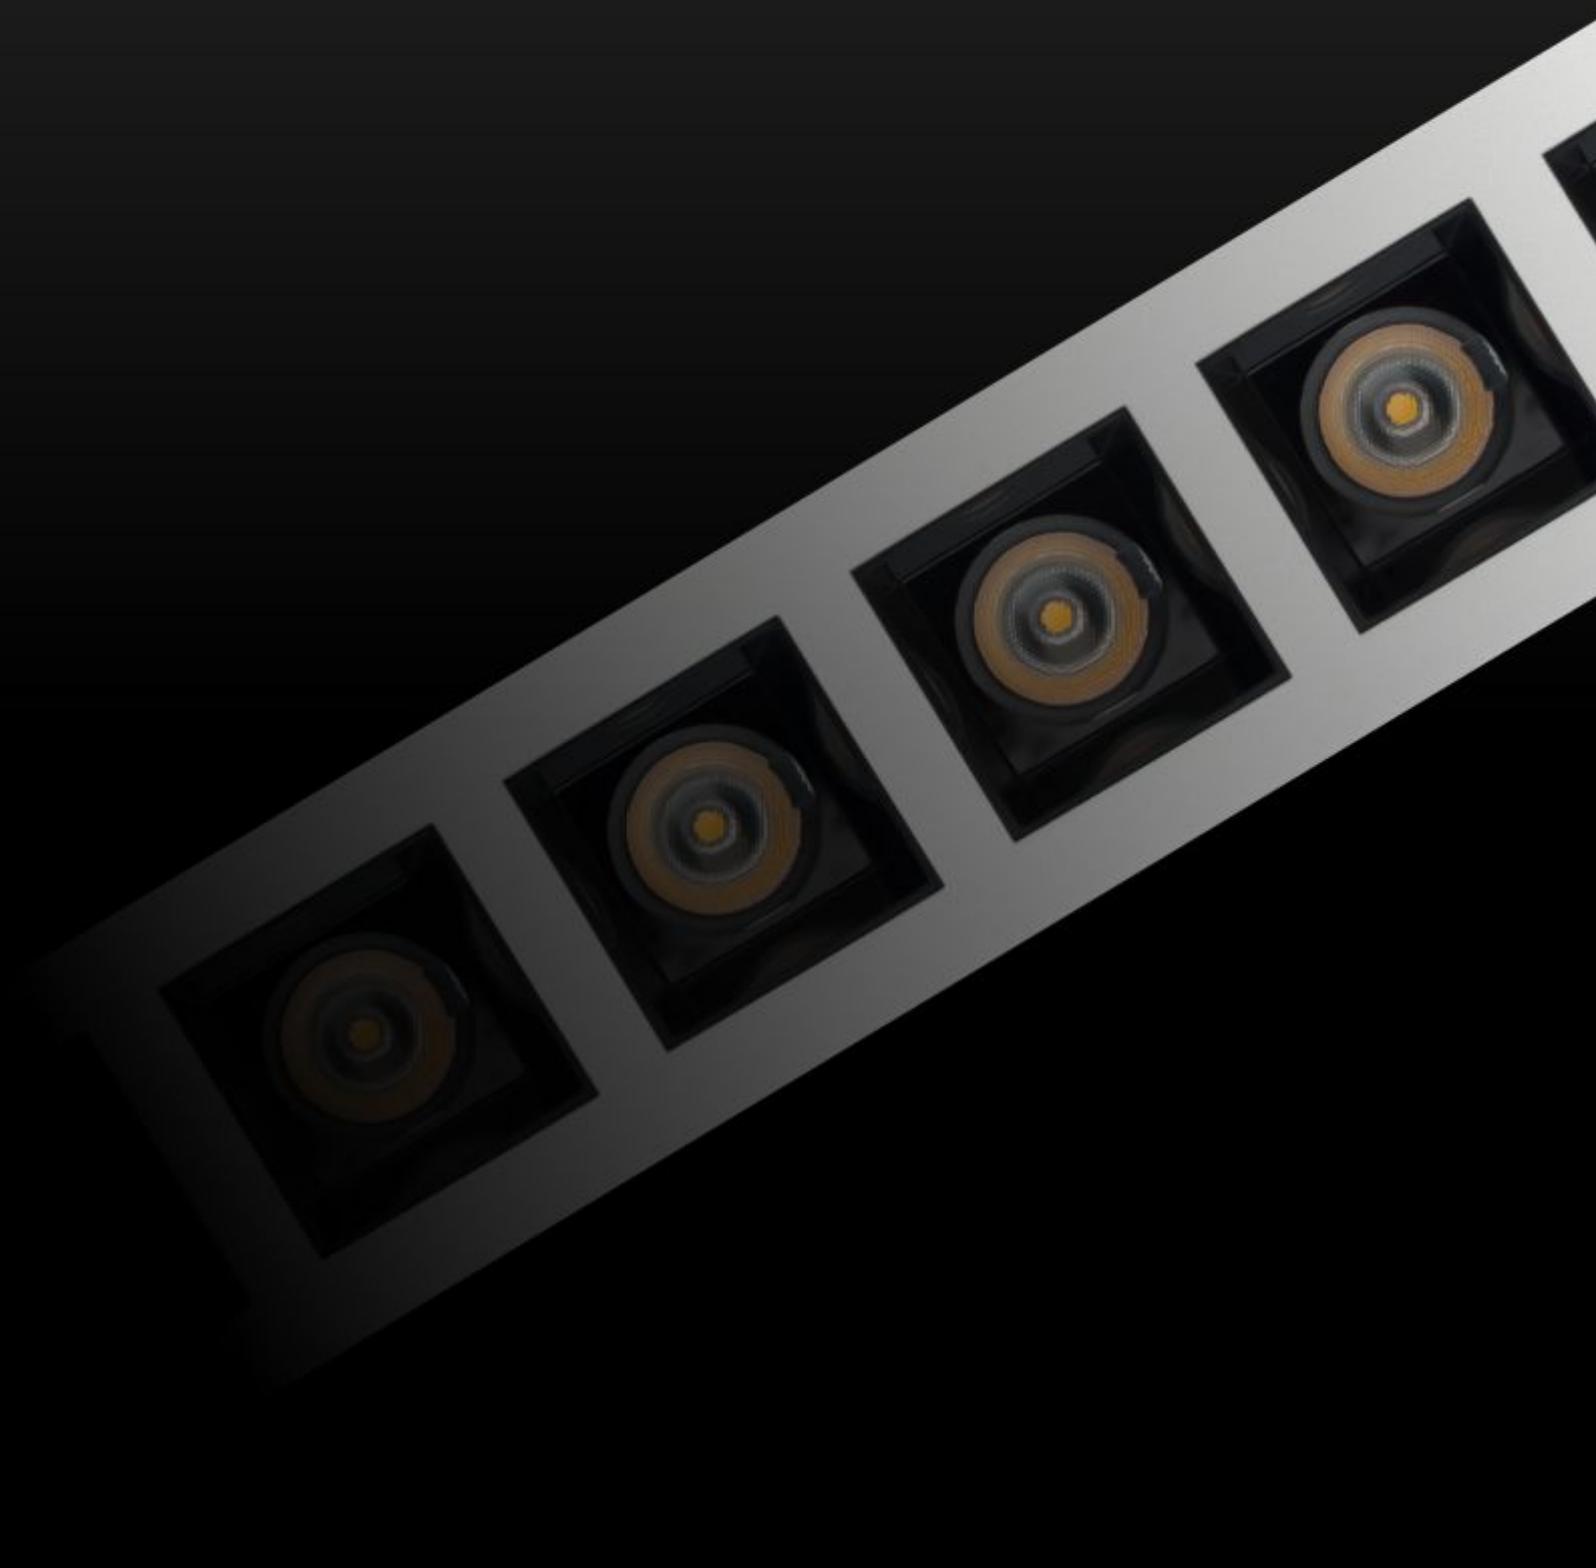

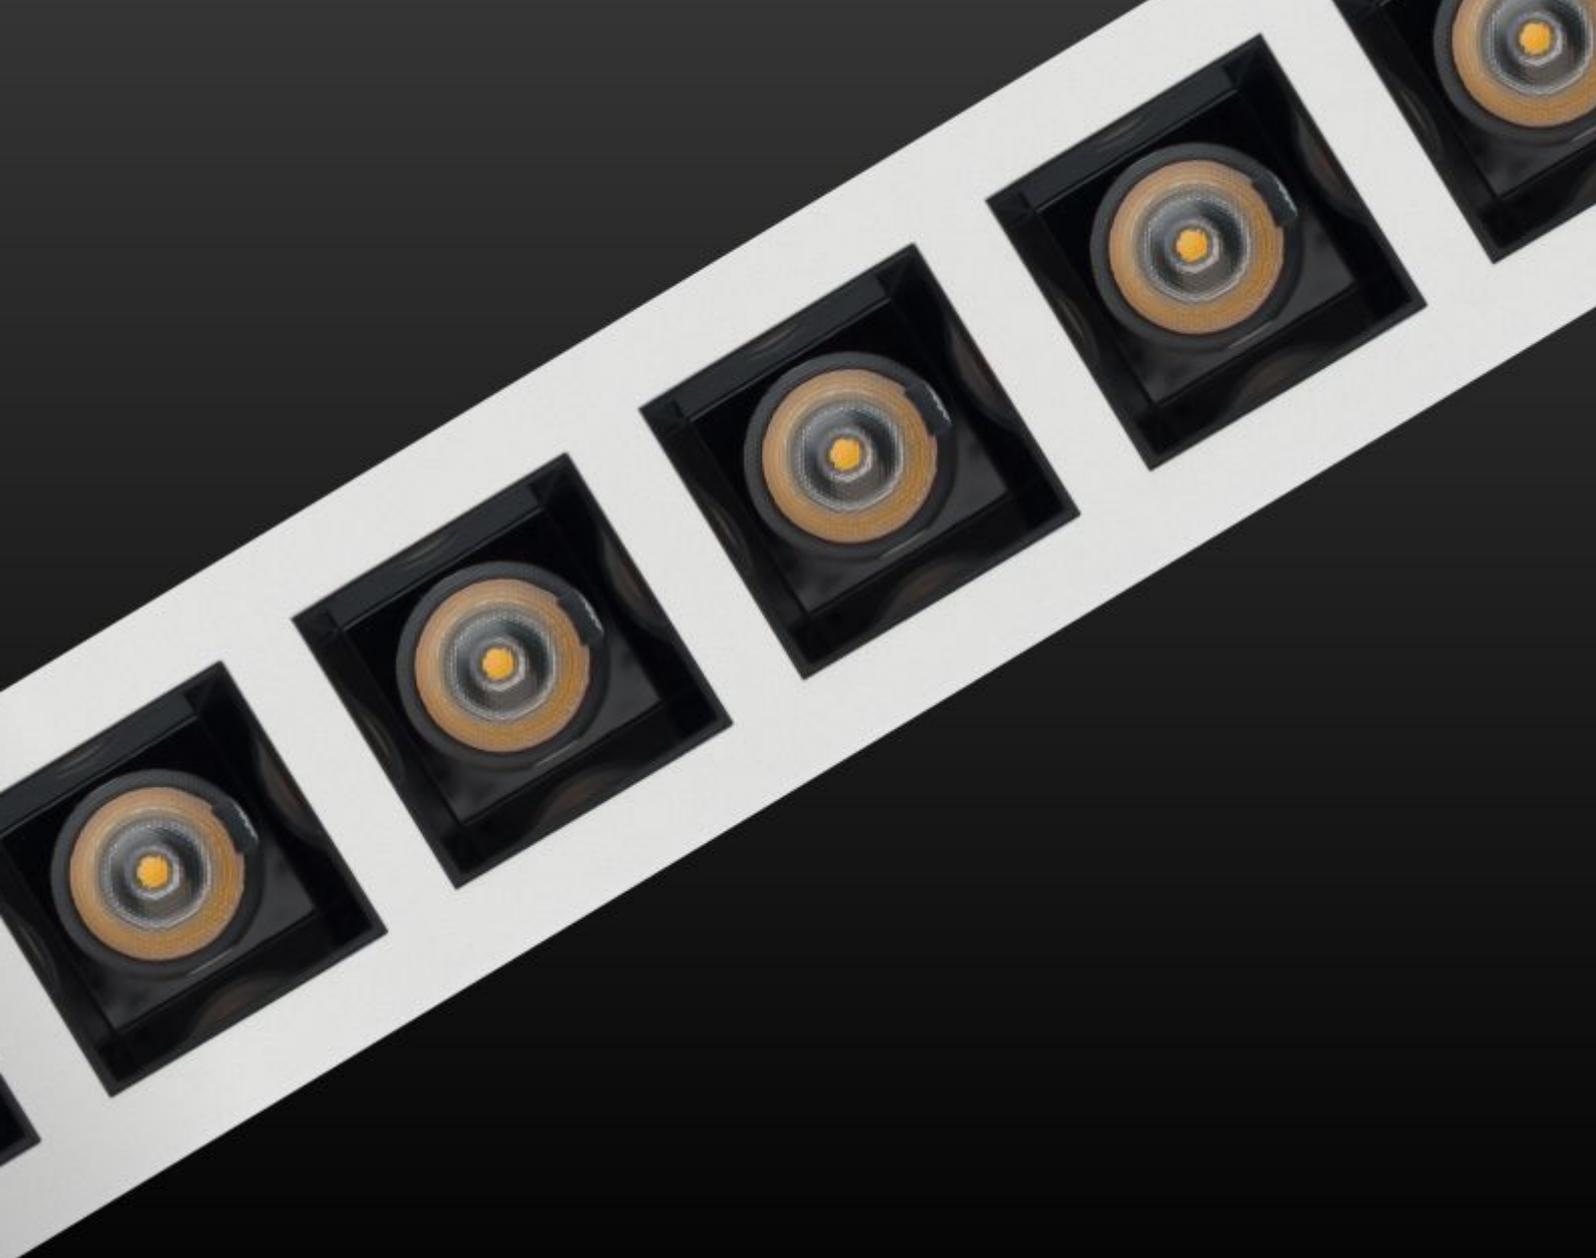

Nedostižna elegancija i sloboda kreiranja osvijetljenja koje se prilagođava svakom prostoru odlike su Modo svjetiljaka.

Kućište Modo serije svjetiljaka izrađeno je čeličnog lima prekrivenog termoepoksidnom bojom u kojem su smještene napredne LED diode snage 1,2W/2,1W.

Inovativan dizajn slaganja u nizove pruža širok spektar mogućnosti, proširivanja, nadogradnje i kreativne slobode arhitektima, dizajnerima interijera i krajnjim korisnicima.

Elegantan i jednostavan dizajn idealan je za dekorativne, stambene i salonske prostore.

Unattainable elegance and the freedom to create lighting that adapts to every space are features of Modo lights

The body of Modo lights is made of special sheet metal with thermal epoxy finish in which advanced LED diodes with 1,2W/2,1W power are placed.

Innovative stacked design offers a wide spectrum of solutions, both in expanding, upgrading or creative freedom to architects, designers and end users.


Elegant and simple design is ideal for decorative, housing and salon purposes.


Small & **powerful**

With only 49mm width, Modo really is a small luminaire.

But its size doesn't represent its power.

Advanced Led technology used in Modo is more than enough to illuminate interiors and accentuate desired zones while the high quality finish and unobtrusive modern design assures that Modo will fit right in, regardless of the style of your interior.

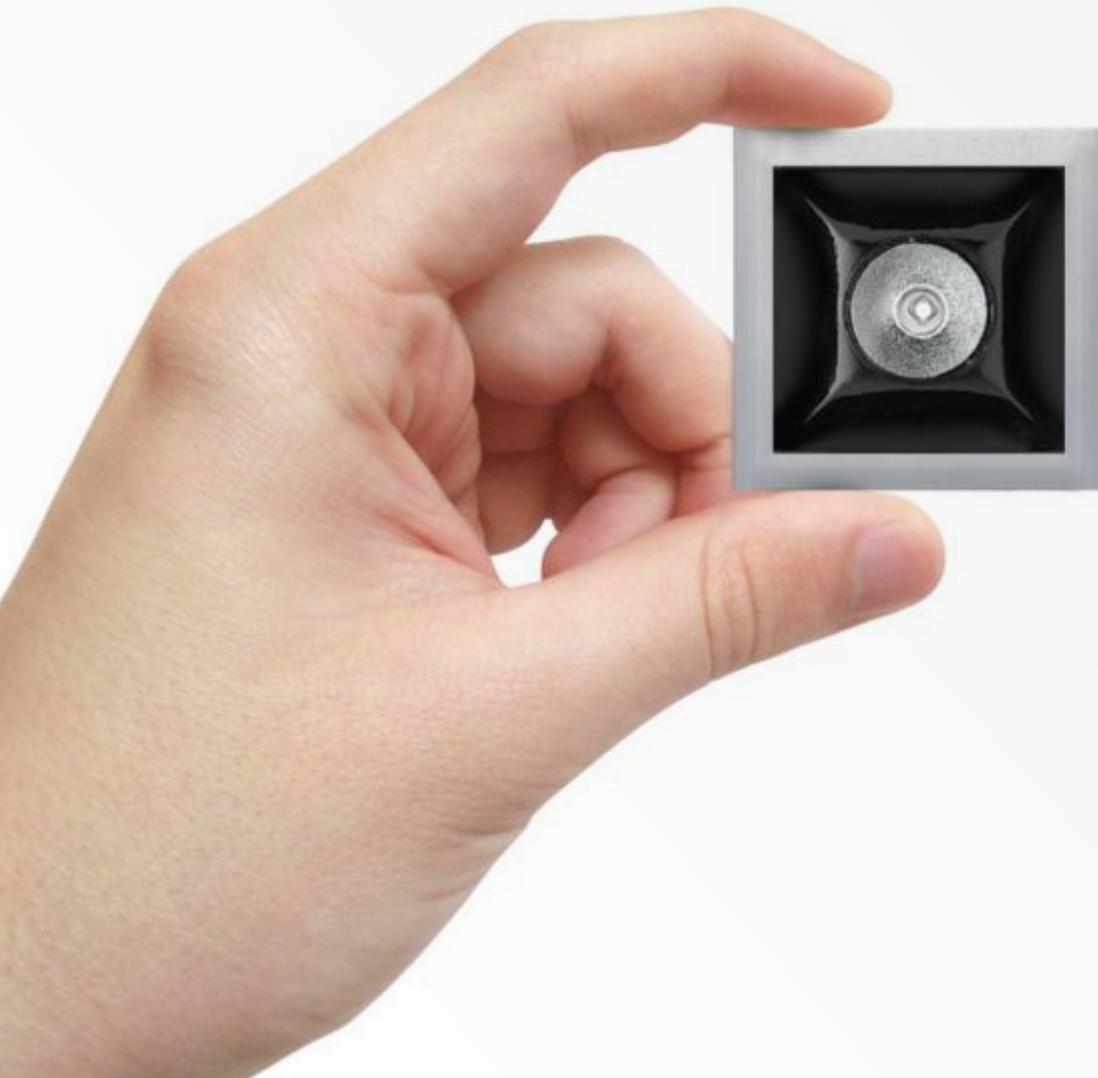

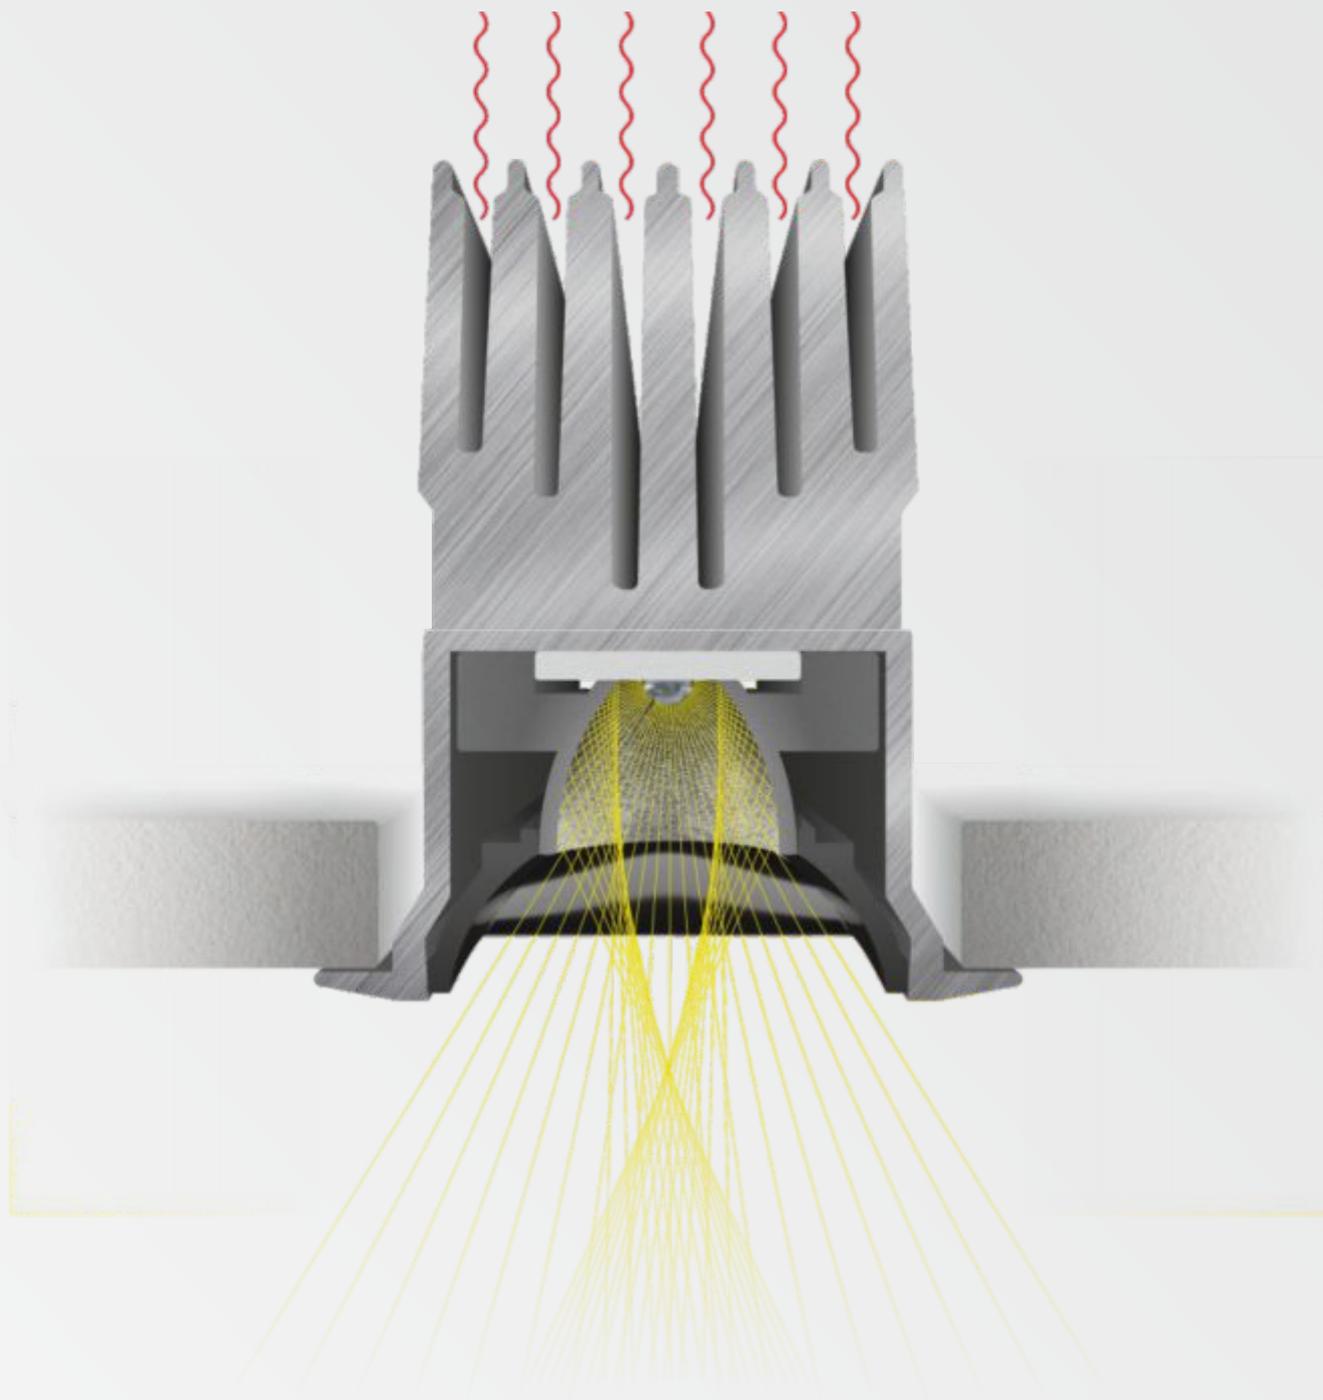

Superior technology

During our research for Modo we decided to use the least amount of different parts as possible, to achieve the best possible luminaire durability and longevity.

The reflector is designed from special polycarbonate plastics and curved to reflect light in such a way that we can achieve maximum output and light quality.



Kućište: lim obojen termoeпокsidnom finostrukturnom bojom

Standardna fino strukturna boja: bijela, siva, crna

Napajanje: 230V/50Hz

Električne komponente:

MOTO UG: odvojena napojna jedinica

MOTO NG: ugrađene u kućište

Izvor svjetla: LED generacije 3, self-cooling, MacAdam 3 CRI>80; LED min 50.000h L70F50 na $T_p=83^{\circ}\text{C}$; EEI A++

Leća: od polikarbonatne termoplastike visokih performansi

Montaža:

MOTO UG: pomoću opruga u otvor

MOTO NG: pomoću vijaka na strop

Spajanje: na priključne stezaljke

Housing: sheet-metal covered with thermal epoxy finely textured colour

Standard color: white, grey, black

Power: 230V/50Hz

Supply unit:

MOTO UG: separated supply unit

MOTO NG: built into housing

Light source: LED generation 3, self-cooling; MacAdam 3 CRI>80; LED min 50.000h L70F50 on $T_p=83^{\circ}\text{C}$; EEI A++

Lens: from high performance polycarbonate thermoplastics

Mounting:

MOTO UG: with springs into opening


MOTO NG: with screws to the ceiling

Connecting: on connection clamps



Prema zahtjevu:    *

*samo kod ugradne verzije/only in recessed variant

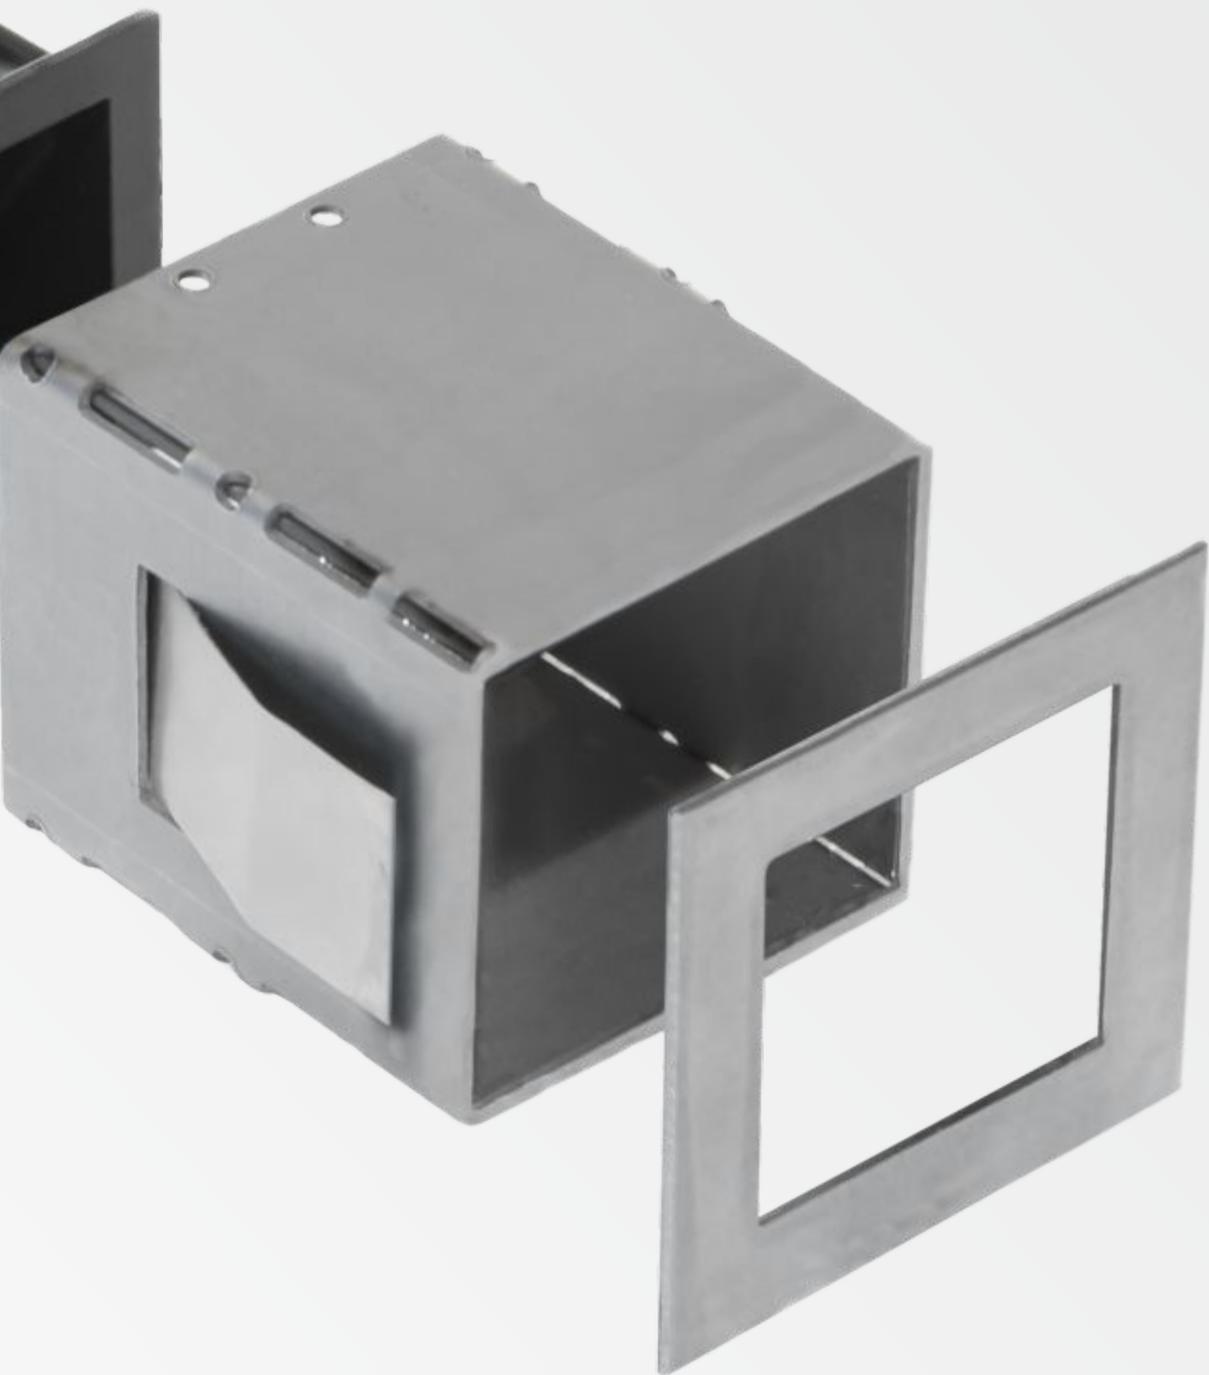

Svjetlo bez blještavila

Posebno za Modo razvili smo odasijač visokih tehnoloških karakteristika koji pruža visoku razinu osvjetljavanja bez neželjenog odbljeska.


No glare technology

We designed and developed a difuser especially for Modo. Our goal was to create a glare free high quality luminaire.





MOD0 NG - Nadgradna LED svjetiljka / Surface mounted LED lamp




| Art. | △ | W | K | V | lm | AxBxH |
|------|---|---|---|---|----|-------|
|------|---|---|---|---|----|-------|

Asimetrični snop / Asymmetric beam

| | | | | | | |
|---------|--------|--------|-------|------|---------|-----------|
| 2381716 | 20-40° | 1x1,2W | 3K/4K | 230V | 114/126 | 49x49x80 |
| 2381726 | 20-40° | 2x1,2W | 3K/4K | 230V | 228/252 | 89x49x80 |
| 2381736 | 20-40° | 3x1,2W | 3K/4K | 230V | 342/378 | 129x49x80 |
| 2381746 | 20-40° | 4x1,2W | 3K/4K | 230V | 456/504 | 169x49x80 |
| 2381756 | 20-40° | 5x1,2W | 3K/4K | 230V | 570/630 | 209x49x80 |



MOD0 art. 2381716




| Art. | △ | W | K | V | lm | AxBxH |
|------|---|---|---|---|----|-------|
|------|---|---|---|---|----|-------|

Simetrični snop / Symmetric beam


| | | | | | | |
|---------|-----|--------|-------|------|---------|-----------|
| 2381711 | 40° | 1x1,2W | 3K/4K | 230V | 114/126 | 49x49x80 |
| 2381721 | 40° | 2x1,2W | 3K/4K | 230V | 228/252 | 89x49x80 |
| 2381731 | 40° | 3x1,2W | 3K/4K | 230V | 342/378 | 129x49x80 |
| 2381741 | 40° | 4x1,2W | 3K/4K | 230V | 456/504 | 169x49x80 |
| 2381751 | 40° | 5x1,2W | 3K/4K | 230V | 570/630 | 209x49x80 |




MOD0 art. 2381711





MODO UG - Ugradna LED svjetiljka / Recessed LED lamp

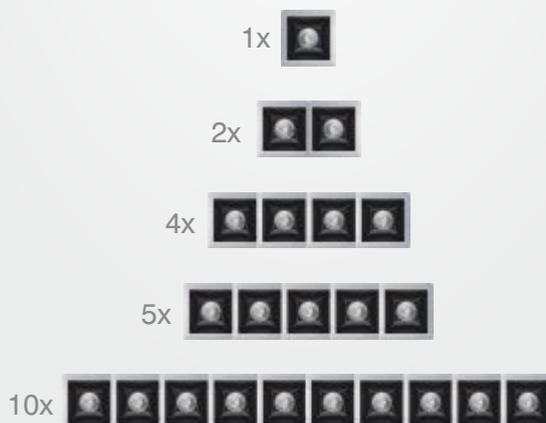

| Art. | △ | W | K | V | lm | ∠ | AxBxH |
|---|---------|---------|-------|------|-----------|--------|-----------|
| Asimetrični snop / Asymmetric beam | | | | | | | |
| 2382716 | 20°/40° | 1x1,2W | 3K/4K | 230V | 114/126 | 45x45 | 49x49x53 |
| 2382717 | 20°/40° | 1x2,1W | 3K/4K | 230V | 228/252 | 45x45 | 49x49x53 |
| 2382726 | 20°/40° | 2x1,2W | 3K/4K | 230V | 228/252 | 86x45 | 89x49x53 |
| 2382727 | 20°/40° | 2x2,1W | 3K/4K | 230V | 456/504 | 86x45 | 89x49x53 |
| 2382746 | 20°/40° | 4x1,2W | 3K/4K | 230V | 456/504 | 141x45 | 169x49x53 |
| 2382747 | 20°/40° | 4x2,1W | 3K/4K | 230V | 912/1008 | 141x45 | 169x49x53 |
| 2382756 | 20°/40° | 5x1,2W | 3K/4K | 230V | 570/630 | 173x45 | 209x49x53 |
| 2382757 | 20°/40° | 5x2,1W | 3K/4K | 230V | 1140/1260 | 173x45 | 209x49x53 |
| 2382706 | 20°/40° | 10x1,2W | 3K/4K | 230V | 1040/1260 | 335x45 | 409x49x53 |
| 2382707 | 20°/40° | 10x2,1W | 3K/4K | 230V | 2280/2520 | 335x45 | 409x49x53 |



| Art. | △ | W | K | V | lm | ∠ | AxBxH |
|---|-----|---------|-------|------|-----------|--------|-----------|
| Simetrični snop / Symmetric beam | | | | | | | |
| 2382711 | 40° | 1x1,2W | 3K/4K | 230V | 114/126 | 45x45 | 49x49x53 |
| 2382712 | 40° | 1x2,1W | 3K/4K | 230V | 228/252 | 45x45 | 49x49x53 |
| 2382721 | 40° | 2x1,2W | 3K/4K | 230V | 228/252 | 86x45 | 89x49x53 |
| 2382722 | 40° | 2x2,1W | 3K/4K | 230V | 456/504 | 86x45 | 89x49x53 |
| 2382741 | 40° | 4x1,2W | 3K/4K | 230V | 456/504 | 141x45 | 169x49x53 |
| 2382742 | 40° | 4x2,1W | 3K/4K | 230V | 912/1008 | 141x45 | 169x49x53 |
| 2382751 | 40° | 5x1,2W | 3K/4K | 230V | 570/630 | 173x45 | 209x49x53 |
| 2382752 | 40° | 5x2,1W | 3K/4K | 230V | 1140/1260 | 173x45 | 209x49x53 |
| 2382701 | 40° | 10x1,2W | 3K/4K | 230V | 1040/1260 | 335x45 | 409x49x53 |
| 2382702 | 40° | 10x2,1W | 3K/4K | 230V | 2280/2520 | 335x45 | 409x49x53 |





ELTOR
IDEAS IN LIGHTING

Industrijska ulica 18 (Ciburi)
P.P. 79, 52000 Pazin - Hrvatska
Telefon: +385 52 622 832
Fax: +385 52 621 298
E-mail: info@eltor.hr
www.eltor.hr