

ELTOR
IDEAS IN LIGHTING

Naos




Svjetiljka Naos nudi idealno svjetlo za urede, zdravstvene ustanove i ostale prostore koji zahtijevaju visoko kvalitetno osvjetljenje. Jednostavan dizajn postignut je izradom iz čeličnog lima obojanog termoeпокsidnom bijelom bojom. Protubljеšteći opalni difuzor s Crystal Ice tehnologijom raspršuje i omekšava svjetlost u interijeru dok konstantna svjetlosna snaga dolazi iz LED izvora. Naos može biti prilagođen nadgradnoj, visećoj ili ugradnoj montaži.

Naos luminaire offers ideal light for offices, healthcare facilities and other spaces that require high quality lighting. The simple design is achieved with the housing made of steel sheet-metal covered with thermal epoxy white colour. The anti-glare opal diffuser with Crystal Ice technology scatters and softens the light in the interior while the constant light power comes from LED source. Naos luminaire can be adapted for surface mounting, suspended or recessed installation.

Naos

ELTOR
IDEAS IN LIGHTING

Ugradna/nadgradna/viseća LED svjetiljka
Recessed/surface mounted/suspended LED luminaire

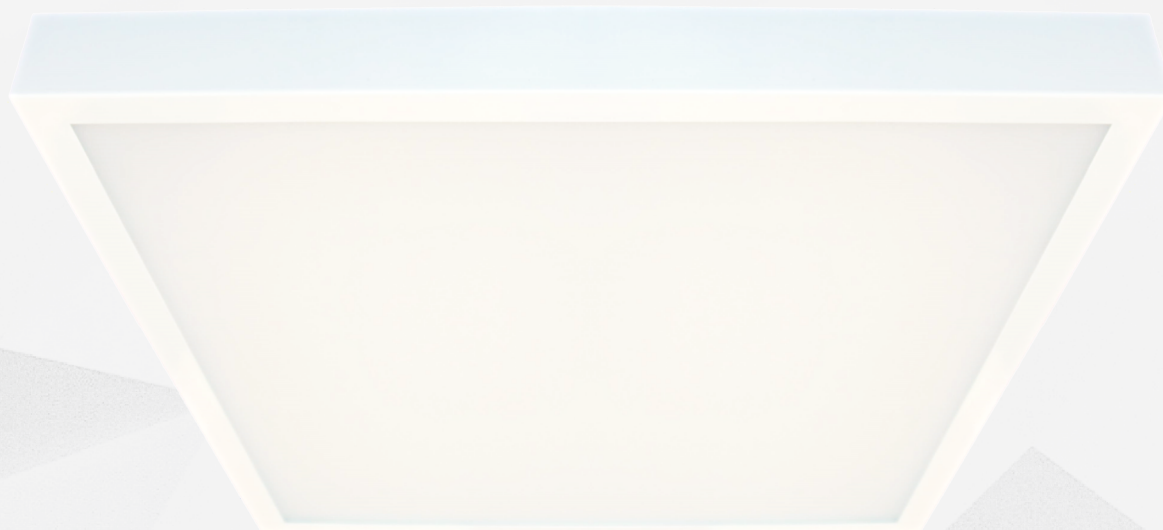

Kućište: čelični lim, električki punktiran i obojan termoeпокsidnom bojom

Standardna boja: bijela

Napajanje: 230V/50Hz

Električne komponente: ugrađene u kućište

Izvor svjetla: LED nove generacije, self-cooling, MacAdam 3, CRI>80; LED min 60.000h L80F50 na $T_p=65^{\circ}\text{C}$. EEI A++

Diffuzor: protubljesteći opalni polikarbonat homogenog efekta tehnologije "Cristal Ice"

Montaža: naslanjanje na strukturu stropa / montaža pomoću okvira u gipsani strop / vijcima na strop / vješanje na čelične visilice

Spajanje: skidanjem difuzora dostupne su priključne stezaljke i ostale električne komponente

Prema zahtjevu: nužna rasvjeta, regulacijska jedinica DALI (vidi upute za naručivanje)

Housing: steel sheet-metal, electrically punctured and covered with thermal epoxy colour

Standard colour: white

Power: 230V/50Hz

Supply unit: built in the housing

Light source: new generation LED, self-cooling, MacAdam 3, CRI>80; LED min 60.000h L80F50 on $T_p=65^{\circ}\text{C}$; EEI A++

Diffuser: anti-glare "Crystal Ice" opal diffuser with homogenous effect

Mounting: leaning on ceiling structure / with frame for plaster ceiling / with screws to the ceiling / hanging on steel suspension wires


Connecting: connection clamps and all other electronic components are available by demounting the diffuser

On request: emergency light, regulation unit DALI (see ordering instructions)

Art.	W	K	V	lm	A x B x H	kg
LED						
1581741	24,2W	3K/4K	230V	3760/3980	595x595x60	5,4
1581742	35,6W	3K/4K	230V	5240/5520	595x595x60	5,4
1581743	51,6W	3K/4K	230V	7060/7420	595x595x60	5,4





Prema zahtjevu:
On request:




O okvir za montažu u gipsani strop
Frame for plaster ceiling mounting
art. 150



Ovjesni pribor
Suspension kit
art. 299

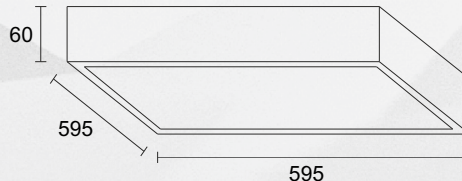



ELTOR
IDEAS IN LIGHTING

Industrijska ulica 18,
P. P. 79, 52000 PAZIN
Tel.: +385 52 622 832
Fax: +385 52 621 298
E-mail: eltor@eltor.hr

www.eltor.hr