



Naos

Svjetiljka Naos nudi idealno svjetlo za urede, zdravstvene ustanove i ostale prostore koji zahtjevaju visoko kvalitetno osvjetljenje. Jednostavan dizajn postignut je izradom iz čeličnog lima obojanog termoeпокsidnom bijelom bojom. Protublješteći opalni difuzor s Crystal Ice tehnologijom raspršuje i omekšava svjetlost u interijeru dok konstantna svjetlosna snaga dolazi iz LED izvora. Naos može biti prilagođen nadgradnoj, visećoj ili ugradnoj montaži.

Naos luminaire offers ideal light for offices, healthcare facilities and other spaces that require high quality lighting. The simple design is achieved with the housing made of steel sheet-metal covered with thermal epoxy white colour. The anti-glare opal diffuser with Crystal Ice technology scatters and softens the light in the interior while the constant light power comes from LED source. Naos luminaire can be adapted for surface mounting, suspended or recessed installation.


Naos

Ugradna/nadgradna/viseća LED svjetiljka / Recessed/surface mounted/suspended LED luminaire



Kućište: čelični lim, električki punktiran i obojan termoeпокsidnom bojom
Standardna boja: bijela
Napajanje: 230V/50Hz
Električne komponente: ugrađene u kućište
Izvor svjetla: LED nove generacije, MacAdam 3, CRI>80;
LED min 80.000h L80B20, UGR<19
Difuzor: protubljesteći prizmatični polikarbonat s opalnom mat folijom
Montaža: naslanjanje na strukturu stropa / montaža pomoću okvira u gipsani strop / vijcima na strop / vješanje na čelične visilice
Spajanje: skidanjem difuzora dostupne su priključne stezaljke i ostale električne komponente
Prema zahtjevu: nužna rasvjeta, regulacijska jedinica DALI (vidi upute za naručivanje)

Housing: steel sheet-metal, electrically punctured and covered with thermal epoxy colour
Standard colour: white
Power: 230V/50Hz
Supply unit: built in the housing
Light source: new generation LED, MacAdam 3, CRI>80;
LED min 80.000h L80B20, UGR<19
Diffuser: anti-glare prismatic diffuser with opal matte foil
Mounting: leaning on ceiling structure / with frame for plaster ceiling / with screws to the ceiling / hanging on steel suspension wires
Connecting: connection clamps and all other electronic components are available by demounting the diffuser
On request: emergency light, regulation unit DALI (see ordering instructions)

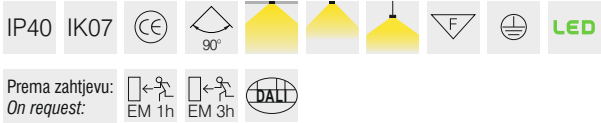

Art.	W	K	V	lm	A x B x H	kg
LED						
1581741	24,0W	3K/4K	230V	4000/4200	595x595x60	5,4
1581742	34,0W	3K/4K	230V	5500/5800	595x595x60	5,4
1581743	43,0W	3K/4K	230V	6330/6640	595x595x60	5,4
1581744	50,0W	3K/4K	230V	7380/7860	595x595x60	5,4

